



Zhongshan Bosenor Lighting Co., Ltd.

Address: No.702,A1 building,six lane garden,GuzhenTown, Zhongshan City, GD province,China. Email:anco@bosenor.com

Tel: +86-760-89865792(direct line) Fax: +86-760-86713504 Mobile:+86-189-2334 9836 Web: http://www.bosenor.com Contact: Anco

Led Candle Lights Specification



3W E14 Gold Led Candle Light Series

Model No.: FY-3W-E14-G

Brand: Bosenor

Product Abstract


100LM/W,CE Rohs Certification, 3 years warranty

Specification

Rate Power	3 watt
Lumen	300LM
LED Qty	3pcs
Chip	COB
CRI	>70
CCT	2700-7000K
Using temperature	-20°C~50°C
Pointed head size	35*L118mm
Pulling tails size	35*L138mm
Beam Angle	360°
Input Voltage	AC85-265V
Lifespan	30,000hrs
Certification	RoHS,CB,CE
Warranty	3 years



Features

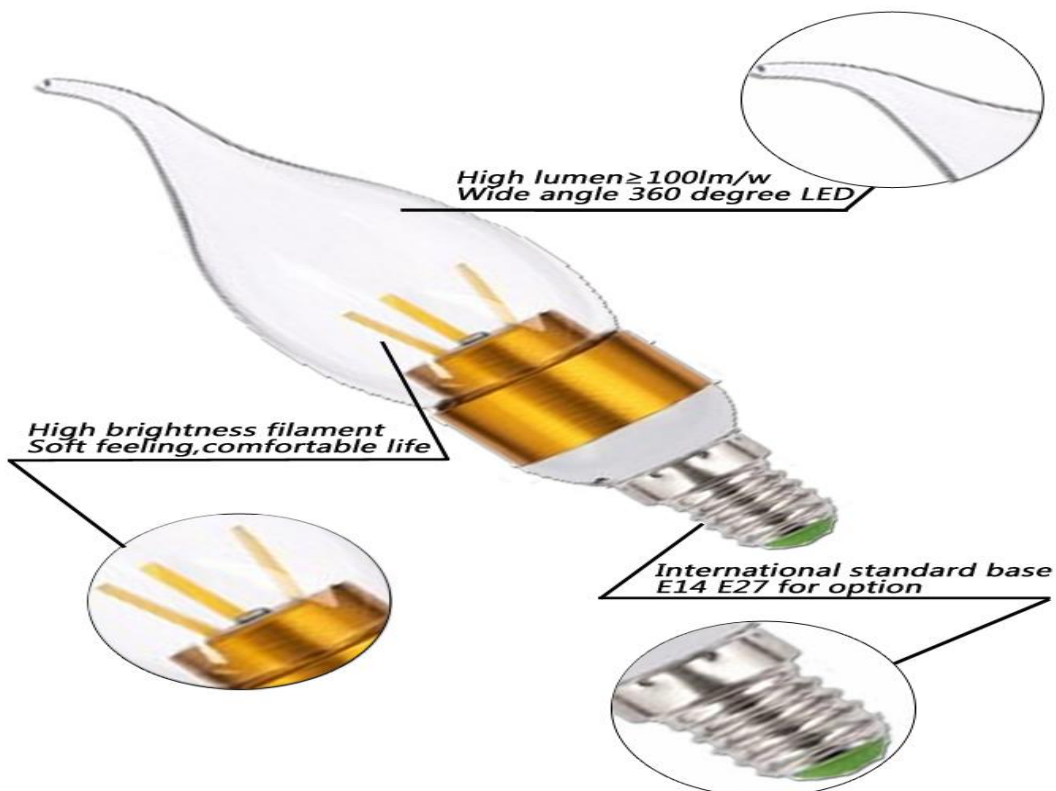



Zhongshan Bosenor Lighting Co., Ltd.

Address: No.702,A1 building,six lane garden,GuzhenTown, Zhongshan City, GD province,China. Email:anco@bosenor.com

Tel: +86-760-89865792(direct line) Fax: +86-760-86713504 Mobile:+86-189-2334 9836 Web: <http://www.bosenor.com> Contact: Anco

Packing


Pack Quantity	100pcs
Net Weight	0.031kg
Gross Weight Per CTN	5.00kg
Box Size	40*40*158mm
CTN Size	420*210*330mm



Installation



E14 LED LAMP

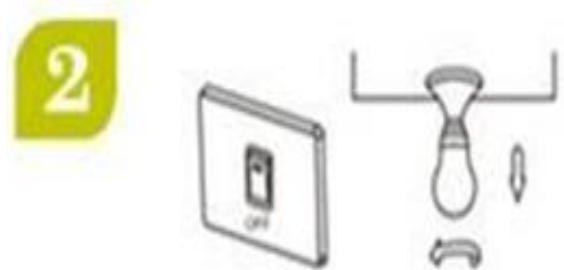

TURN OFF THE SWITH,REMOVE THE TUNGSTEN LAMP IN COUNTER CLOCKWISE ROTATION



Turn the led lamp in clockwise rotation



After installation without mistakes,it can be easy to use only push swithc closure



Zhongshan Bosenor Lighting Co., Ltd.

Address: No.702,A1 building,six lane garden,GuzhenTown, Zhongshan City, GD province,China. Email:anco@bosenor.com

Tel: +86-760-89865792(direct line) Fax: +86-760-86713504 Mobile:+86-189-2334 9836 Web: <http://www.bosenor.com> Contact: Anco

APPLICATION

- 1.Residential Buildings, Home
- 2.Office, Meeting Room
- 3.School, Library
- 4.Factory, Warehouse
- 5 .Hotel, Casino
- 6.Parking Garage
- 7.Hospital
- 8.Commercial Center
- 9.Supermarket, Shopping mall,anywhere you want



IN LOBBY---CANADA



IN BAR---IN AUSTRALIA

